


WeatherMAX SG

What Fabric Can Do™




LIGHT CHARCOAL SG334 X

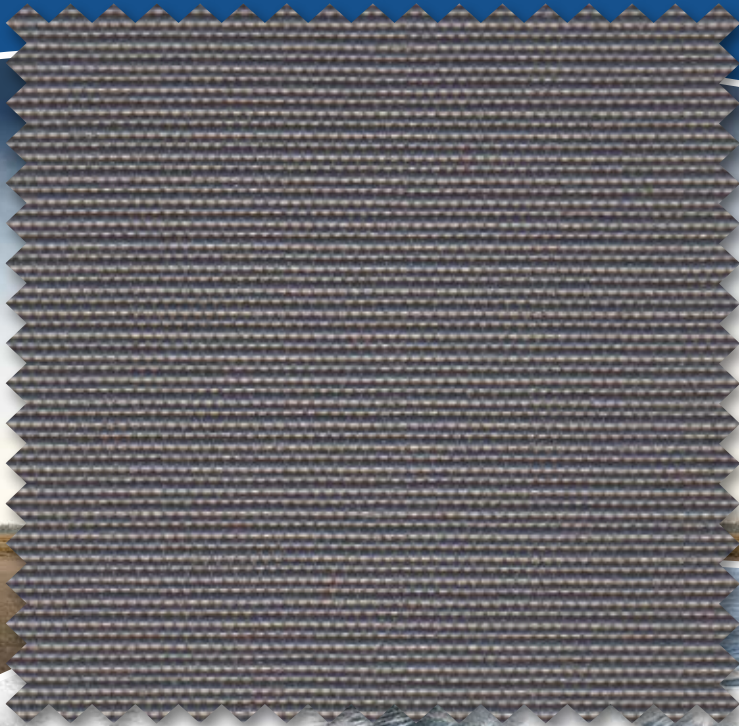

GRAPHITE SG431 X



BLACK SG355 X



TOAST SG348 X



WHITE SG371 X



Coverage with a Softer Side

WeatherMAX SG (Surface Guard) is the latest addition to Safety Components' outdoor fabric line. WeatherMAX SG starts with the worldwide proven performance and durability of solution-dyed WeatherMAX 80 with an added soft backing to provide an extra level of scratch and scuff resistance for high-end surfaces.

Most soft-backed outdoor fabrics use an inexpensive needle-punch polyester, which creates a felt-like soft backing but also collects and holds dirt and contaminants that can cause scratching. These low-cost backings also absorb and hold water, creating a multitude of issues. WeatherMAX SG uses a flannel-like backing. While it is more expensive, it is less bulky and does not entangle contaminants like a needle-punched polyester.

What makes WeatherMAX SG unique is that it brings the high water resistance combined with real breathability for which WeatherMAX 80 is known. Our unique processes for laminating maintains the ideal balance. We even take the extra step of applying our HydroMax finish to both sides of the composite fabric, further enhancing the water shedding capabilities of the fabric.

Care Instructions

WeatherMAX fabrics may be spot washed using a soapy solution of a mild detergent and lukewarm water. Rinse thoroughly with clean water to remove soap and allow to air dry. For mildew stains, prepare a solution of (1) cup bleach plus (1/2) cup of mild detergent per gallon of water. Spray on the entire area and allow soaking. Rinse with clean water and allow to air dry.

WeatherMAX SG Warranty

The limited warranty covers only the fabric being unserviceable because of loss of strength and/or color from normal conditions of exposure. That includes sunlight, mildew and atmospheric chemicals. Labor and installation supplied by the fabricator and/or installer are not covered. The consumer is responsible for normal care, cleaning and maintenance of the fabric.

- * The warranty runs for 5 years from the date of original purchase for WeatherMAX SG.
- * Safety Components will supply new fabric, free of charge, to replace the unserviceable fabric.
- * Call your dealer who will contact Safety Components to request fabric replacement.
- * A valid copy of the original invoice, showing date of purchase, is required for fabric replacement.
- * This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

See website for additional warranty details.



WeatherMAX, HydroMax and ColorTite are trademarks or registered trademarks of Safety Components, Inc. SaturaMax is a registered trademark of Unifi, Inc.



Properties

Weight ASTM D3776 (oz/yd ²)	10.5
Tensile Strength ASTM D5034 (lbs.)	W × F 605 × 452
Tongue Tear ASTM D4533 (lbs.)	W × F 18 × 20
Spray Rating AATCC 22 (scale)	100
Hydrostatic Test AATCC 127 (in.)	48
Water Repellency AATCC DuPont (grade 1-6)	6
Oil Repellency AATCC 118-1983 (grade 1-6)	4
Colorfastness to Light (no filters) AATCC 169 (grade) (1500 accelerated hours)	4 - 5
UPF (Ultraviolet Protection Factor) AATCC 183 (score)	50+
UVA & UVB (Ultraviolet Blockage) AATCC 183	Over 99%

Specifications

- * Made in U.S.A.
- * Roll Size: 60 yards
- * Width: 60" slit
- * Meets California Proposition 65



40 Emery Street
Greenville, SC 29605
800.896.6926 ext. 14
www.weathermax.com

